



ITM-C-DS (PAL)

ITM-C-26 (NTSC)

Color Camera Module




General Description

This is a family of products based on the most advance CMOS mixed signal technology. It integrates image array, signal processing, timing and control circuitry, all on a single chip. It is ideal for applications requiring a small footprint, low power and low cost.

Features

- Small size 29 × 29 mm
- Full resolution 365,000 pixel
- Wide operation voltage..... 8 – 15V
- Lens..... f6.0mm F1.6
- IR filter Built in
- Low power consumption <200mW
- Direct connect to standard video monitor
- On-chip auto exposure control
- Gamma correction..... 0.45/1.0
- Auto gain control..... 18dB
- White balance automatic
- Black level calibration automatic

Layout and Dimensions [in mm]

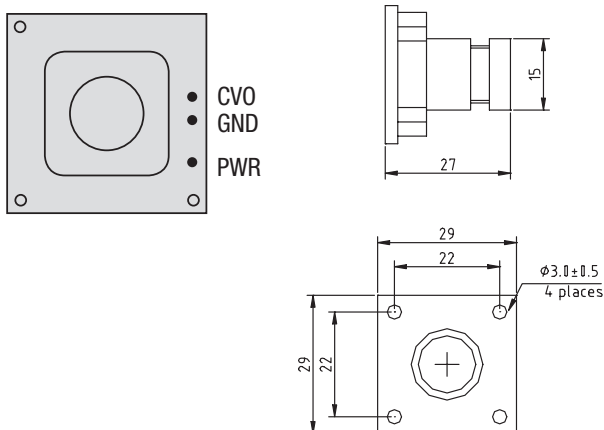

Specification

Product	ITM-C-DS (PAL)	ITM-C-26 (NTSC)
Imager	CMOS imager sensor	CMOS imager sensor
Scanning	2:1 Interlace	2:1 Interlace
Shutter	1/60 to 1/15,000 sec	1/60 to 1/15,000 sec
Video Output	Compos. video (75Ω)	Compos. video (75Ω)
Picture Element	628 × 582 pixel	510 × 492 pixel
Effect. image area	5.78 × 4.19mm	4.69 × 3.54mm
Resolution	340 TV Lines	340 TV Lines
S/N Ratio	>42dB (AGC on)	>42dB (AGC on)
Min. Illumination	3Lux at f1.2 (3000K)	3Lux at f1.2 (3000K)
Operation Voltage	8 – 15 VDC	8 – 15 VDC
Connectors	PWR, Video, GND	PWR, Video, GND
Lens	f6.0mm F1.6, FOV 51° × 43°	

Application Example

Video conferencing · Video Phone · Video email
PC multimedia · Security and Surveillance System · Toys

Normalized Spectrum Response

